

## IPC4BF2R4-I1-TML

### 4MP Starlight Fixed Bullet Network Camera



#### Key Features:


- High quality imaging with 4MP resolution
- Efficient H.265+ compression technology
- Clear imaging against strong backlight due to 120 dB WDR technology
- Water and dust resistant (IP67)
- Built-in microphone for real-time audio security

#### Specifications

Camera	
Image Sensor	1/2.7" Progressive scan CMOS Sensor
Min. Illumination	0.006 Lux(Color), 0 Lux(with light)
Lens Type&Focal Length	Fixed focal lens, 2.8mm@F1.6
FOV	horizontal FOV: 112°, vertical FOV: 60°, diagonal FOV: 131°
IR	2pcs Array LED
IR Range	131ft(40m)
StrobeLight	Support
Smart IR	Support
Shutter Time	Auto/Manual, 1/3~1/10000s
Day/Night	IR cut filter with auto switch
Wide Dynamic Range	120dB
Digital noise reduction	2D/3D DNR
Compression Standard	
Video Compression	H.265/H.265+/H.264/H.264+/MJPEG
H.264 Codec profile	Base/Main/High profile
H.265 Codec profile	Main profile
Video Bit Rate	11 Kbps~8 Mbps
Triple Streams	NA
Audio Compression	G.711A, G.711U
Audio Bit Rate	64 Kbps
Image	
Max. Image Resolution	4MP(2688 × 1520)
Frame Rate	50Hz: 25fps 4M(2688 × 1520) 25fps 3M(2304 × 1296) 25fps 1080P(1920 × 1080) 60Hz:30fps 4M(2688 × 1520) 30fps 3M(2304 × 1296) 30fps 1080P(1920 × 1080)
Sub Stream	50Hz:25fps 720P(1280 × 720) 25fps D1(704 × 576),25fps CIF(352 × 288) 60Hz:30fps 720P(1280 × 720) 30fps D1(704 × 480),30fps CIF(352 × 240)
Third Stream	50Hz: 25fps CIF(352 × 288) 60Hz: 30fps CIF(352 × 240)
Image Setting	Brightness/Contrast/Saturation/Hue/Sharpness
BLC	Support
HLC	Support
ROI	Support
Defog	Support
Rotate	Support
Network	
Network Storage	NAS(NFS, SMB/CIFS)
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P, Bonjour
Basic Event	Motion detection (support alarm triggering by specified target types (human and vehicle)), Video Shelter
Perimeter Protection	Line crossing detection, Area intrusion(support alarm triggering by specified target types (human and vehicle))
System compatibility	Open Network Video Interface (Profile S, Profile G, Profile T), SDK
Security	Password protection, complicated password, IP address filtering, TLS 1.1/1.2
Web Browsers	Plug-in required live view: IE 10, IE 11 Local service: Chrome 57.0+, Firefox 52.0+
Mobile Surveillance	iPhone, Android devices
Interface	
Communication interface	1 RJ45 10M/100M Ethernet Port
On-board storage	Micro SD, up to 256GB
Built-in Mic	Support
Reset button	Support

General	
Operating Conditions	-40°F ~ 140°F (-40°C ~ 60°C) Humidity 95% or less (non-condensing)
Power Supply	DC12V ± 10%
POE Supply	PoE (802.3af)
Power Consumption	MAX. 7W
Weather Proof	IP67
Vandalproof	NA
Dimensions	Φ2.63" × 6.78" (68 × 172.3mm)
Weight	500g

## ■ Dimensions

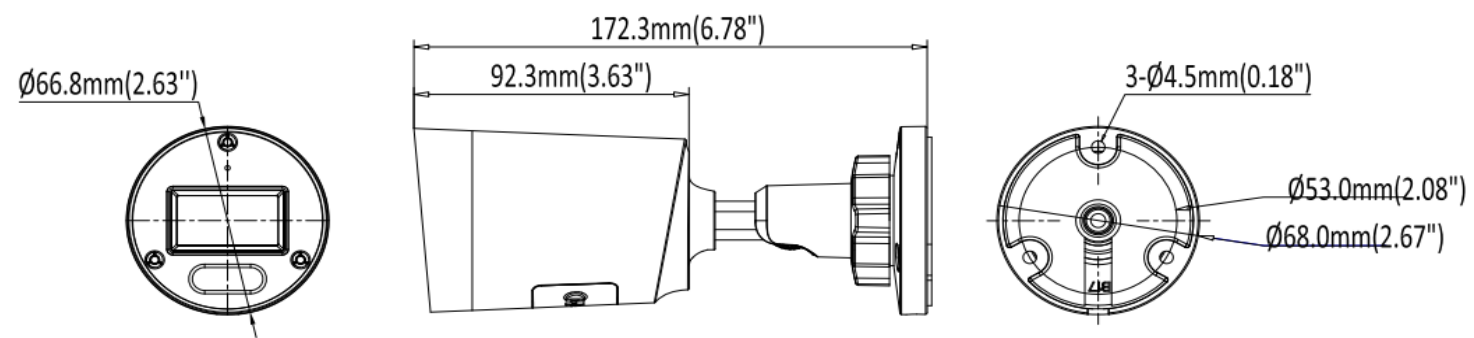

## ■ Related Accessories

Junction Box, 145*145*53.5MM <b>LB01B</b>	Junction Box, non waterproof, $\Phi$ 102*40MM <b>LB02</b>	Junction Box, $\Phi$ 112.5*49.5MM <b>AC-JB02</b>	Pole Mount <b>AC-PM02</b>	Pendent Mount <b>AC-CMB02</b>

© Homaxi Inc. All rights reserved.

\*Product specifications are subject to change without notice.