

IPC6BV2R8-I2-TPMLZ
8MP Starlight Motorized Bullet Network Camera




Key Features:

- High quality imaging with 8MP resolution
- Motorized varifocal lens for easy installation and monitoring
- Efficient H.265+ compression technology
- Clear imaging against strong backlight due to 120 dB WDR technology
- Focus on human and vehicle targets classification based on deep learning
- Water and dust resistant (IP67)
- Built-in microphone, audio and alarm interface available

■ Specifications

Camera	
Image Sensor	1/2.8" Progressive scan CMOS Sensor
Min. Illumination	0.006 Lux(Color), 0 Lux(IR on)
Illumination Distance	229ft(70m <IR light>)
StrobeLight	Support
Smart Light	Support
Pan/Tilt/Rotation Range	Pan: 0°~360° Tilt: 0°~90° Rotation: 0°~360°
Lens	
Focal Length	2.7-13.5mm
Aperture	F1.6
FOV	horizontal FOV:108° ~ 34° , vertical FOV:58° ~ 19°, diagonal FOV: 130° ~ 39°
Lens Mount	φ14
Compression Standard	
Video Compression	H.264/H.264+/H.265/H.265+/MJPEG
H.264 Codec profile	Base/Main/High profile
H.265 Codec profile	Main profile
Video Bit Rate	11 Kbps~16 Mbps
Triple Streams	Support
Audio Compression	G.711A, G.711U
Audio Bit Rate	64 Kbps
Image	
Max. Image Resolution	8MP(3840 × 2160)
Main Stream	50Hz: 25fps 8MP(3840 × 2160), 25fps 6MP(3200 × 1800), 25fps 5MP(3072 × 1728) 25fps 4MP(2560 × 1440), 25fps 1080P(1920 × 1080) 60Hz: 30fps 8MP(3840 × 2160), 30fps 6MP(3200 × 1800), 30fps 5MP(3072 × 1728) 30fps 4MP(2560 × 1440), 30fps 1080P(1920 × 1080)
Sub Stream	50Hz: 25fps 720P(1280 × 720) 25fps D1(704 × 576),25fps CIF(352 × 288)(default: D1) 60Hz: 30fps 720P(1280 × 720) 30fps D1(704 × 480),30fps CIF(352 × 240)
Third Stream	50Hz: 25fps CIF(352 × 288) 60Hz: 30fps CIF(352 × 240)
Image Setting	Brightness/Contrast/Saturation/Hue/Sharpness
Shutter Time	Auto/Manual, 1/3~1/100000s
Day/Night	IR cut filter
Wide Dynamic Range	120dB
Digital noise reduction	2D/3D DNR
BLC	Support
HLC	Support
ROI	Support
Rotate	Support
Smart Feature	
Basic Event	Motion detection (support alarm triggering by specified target types (human and vehicle)), Video Shelter
Smart Event	Line crossing detection, Area intrusion, Region Entrance, Region Exiting(support alarm triggering by specified target types (human and vehicle)), Scene Change Detection
Face Detection	Support
Network	
Network Storage	NAS (NFS, SMB/CIFS), ANR
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P
System compatibility	Onvif(Profile S, Profile G, T), SDK
Security	Password protection, complicated password, HTTPS encryption, IP address filter, basic and digest authentication for HTTP/HTTPS, TLS 1.1/1.2, WSSE and digest authentication for Open Network Video Interface
User	Up to 40 users
Web Browsers	Plug-in required live view: IE 10, IE 11 Local service: Chrome 57.0+, Firefox 52.0+
Mobile Surveillance	iPhone, Android devices
Interface	
Communication interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
On-board storage	up to 256GB
MIC	Support
Speaker	N/A
Audio I/O	1/1
Alarm I/O	1/1
Reset button	Support
General	
Operating Conditions	-40°F ~ 140°F(-40°C ~ 60°C) Humidity 95% or less (non-condensing)
Power Supply	DC12V ± 25%
POE	PoE (802.3af)
Power Consumption	MAX. 11W
Protection Level	IP67
Material	Metal
Dimensions	Φ2.99" × 8.5" (76 × 215.8 mm)
Gross Weight	980g

■ Dimensions

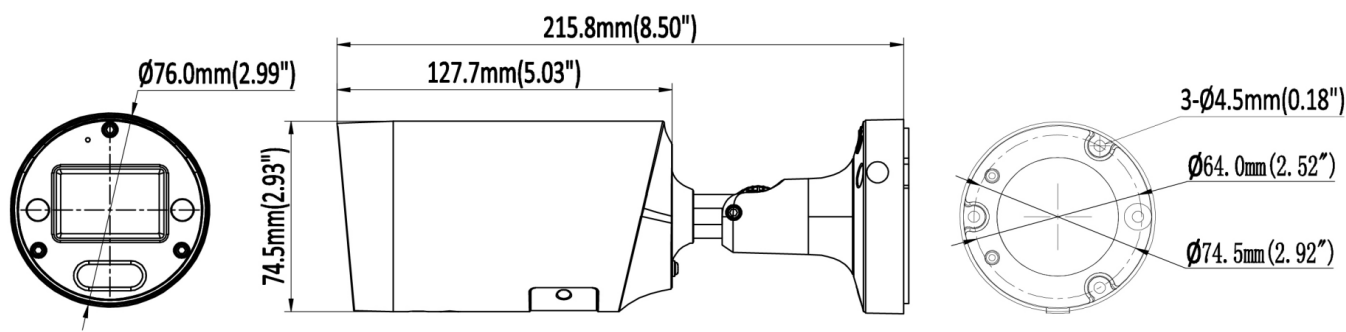

■ Related Accessories

Junction Box, Φ112.5×49.5MM AC-JB02	Junction Box, non-waterproof, Φ102×40MM LB02	Junction Box, 145×145×53.5MM LB01B	Pole Mount AC-PM02	Pendent Mount AC-CMB02
				

© Homaxi Inc. All rights reserved.
*Product specifications are subject to change without notice.