

UVC6BV2U

5MP Varifocal Bullet Camera



Key Features:

- 5 MP Varifocal Bullet camera
- D-WDR, 2DNR
- 3.3-12mm Varifocal Lens
- 196ft(60m) IR distance
- Water and dust resistant (IP67)
- 4 in 1 (4 signals switchable TVI/AHD/CVI/CVBS)

■ Specifications

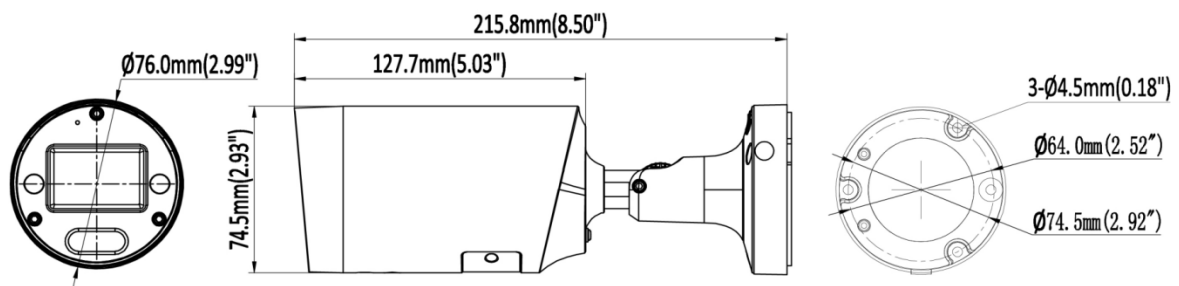
Camera	
Image Sensor	1/2.7" CMOS Sensor
Signal System	PAL/NTSC
Effective Pixels	2592 (H) × 1944 (V)
Electronic Shutter	AUTO/ 1/50(1/60)-1/50,000sec
Min. Illumination	0.01 Lux@(F1.2, AGC ON), 0 Lux with IR
Video Frame Rate	PAL/NTSC:5MP@20fps
Video Output	AHD/TVI/CVI/CVBS
Camera Features	
S/N Ratio	≥50dB
Noise Reduction	2D DNR
Day&Night	EXT/Auto/Color/B&W
White Balance	ATW/Manual
WDR	D-WDR
IR LED	4pcs Array LED
IR Range	196ft(60m)
Lens	
Focal Length	3.3-12mm Manual Zoom Lens
Angle of View	Horizontal FOV: 102~38°,Vertical FOV: 56~22°, Diagonal FOV: 118~42°
Lens Type	Fixed Iris
Mount Type	Φ14
General	
IP Rating	IP67
Housing Material	Metal
Power Supply	DC12V(±10%)
Power Consumption	<12W

Working Temperature / Humidity	-40°F ~ 140°F (-40°C ~ 60°C) Humidity 95% or less (non-condensing)
Dimensions	Φ2.92" × 8.5" (74.5 × 215.8mm)
Weight	720g





■ Available Models

UVC6BV2U (3.3-12mm)

■ Dimensions



■ Related Accessories

Junction Box, 145 × 145 × 53.5MM, LB01	Junction Box, non-waterproof, Φ 102 × 40MM, LB02	Junction Box, Φ 112.5 × 49.5MM, AC-JB02
		
Junction Box, Φ 112.5 × 49.5MM, LB10+Plate		
		

©Homaxi Inc. All rights reserved.

*Product specifications are subject to change without notice.