

# UVC6TV1U

## 5MP Varifocal Turret Camera



### Key Features:

- 5 MP Varifocal Turret camera
- D-WDR, 2DNR
- 3.3-12mm Varifocal Lens
- 196ft(60m) IR distance
- Water and dust resistant (IP67)
- 4 in 1 (4 signals switchable TVI/AHD/CVI/CVBS)

### ■ Specifications

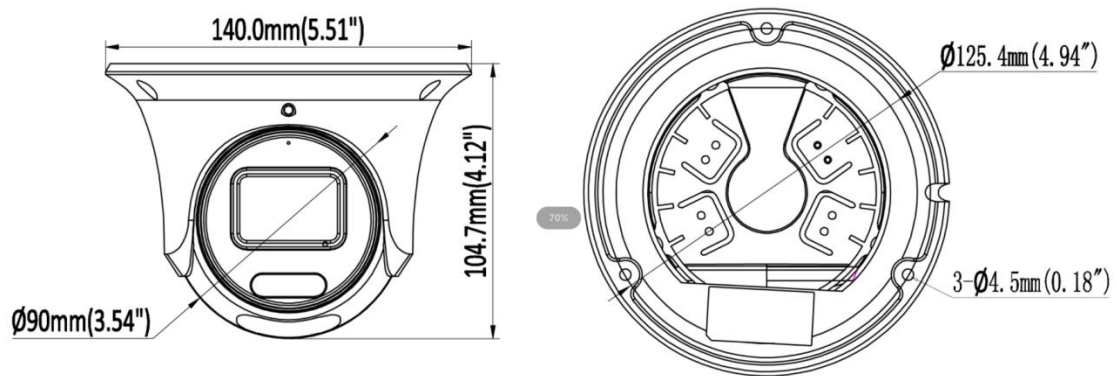
| Camera             |  |
|--------------------|--|
| Image Sensor       | 1/2.7" CMOS Sensor   |
| Signal System      | PAL/NTSC   |
| Effective Pixels   | 2592 (H) × 1944 (V)  |
| Electronic Shutter | AUTO/ 1/50(1/60)-1/50,000sec   |
| Min. Illumination  | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR                               |
| Video Frame Rate   | PAL/NTSC: 5MP@20fps  |
| Video Output       | AHD/TVI/CVI/CVBS   |
| Camera Features    |  |
| S/N Ratio          | ≥50dB  |
| Noise Reduction    | 2D DNR   |
| Day&Night          | EXT/Auto/Color/B&W   |
| White Balance      | ATW/Manual   |
| WDR                | D-WDR  |
| IR LED             | 4pcs Array LED   |
| IR Range           | 196ft(60m)   |
| Lens               |  |
| Focal Length       | 3.3-12mm Manual Zoom Lens  |
| Angle of View      | Horizontal FOV: 102~38°, Vertical FOV: 56~22°, Diagonal FOV: 118~42° |
| Lens Type          | Fixed Iris   |
| Mount Type         | Φ14  |
| General            |  |
| IP Rating          | IP67   |
| Housing Material   | Metal  |
| Power Supply       | DC12V (±10%)   |
| Power Consumption  | <12W   |

|                                |   |
|--------------------------------|---|
| Working Temperature / Humidity | -40°F ~ 140°F (-40°C ~ 60°C)<br>Humidity 95% or less (non-condensing) |
| Dimensions                     | Φ5.51" × 4.12" (140 × 104.7mm)  |
| Weight                         | 620g  |



## ■ Available Models

UVC6TV1U (3.3-12mm)

## ■ Dimensions



## ■ Related Accessories

| Junction Box,<br>145 × 145 × 53.5MM, <b>LB01</b>                                    | Junction Box,<br>Φ 142 × 46.5MM, <b>AC-JB04</b>                                     |
|---|---|
|  |  |

©Homaxi Inc. All rights reserved.

\*Product specifications are subject to change without notice.